


Velocitykvm-5

Single-Mode Fiber Extension System – RGB/DVI Display

QUICK START GUIDE

The Thinklogical™ **Velocitykvm-5** RGB/DVI Single-Mode Fiber Optic System consists of a transmitter unit and a receiver unit connected by one single-mode fiber optic cable up to 40 kilometers. The transmitter unit connects to the computer with standard cables and the receiver unit provides connections to the user interface devices. The **Velocitykvm-5** supports PS/2, full duplex stereo audio, serial (RS-232), USB 1.0 (HID) device ports and USB 1.1. USB 2.0 (high speed up to 480Mbps) is optional.

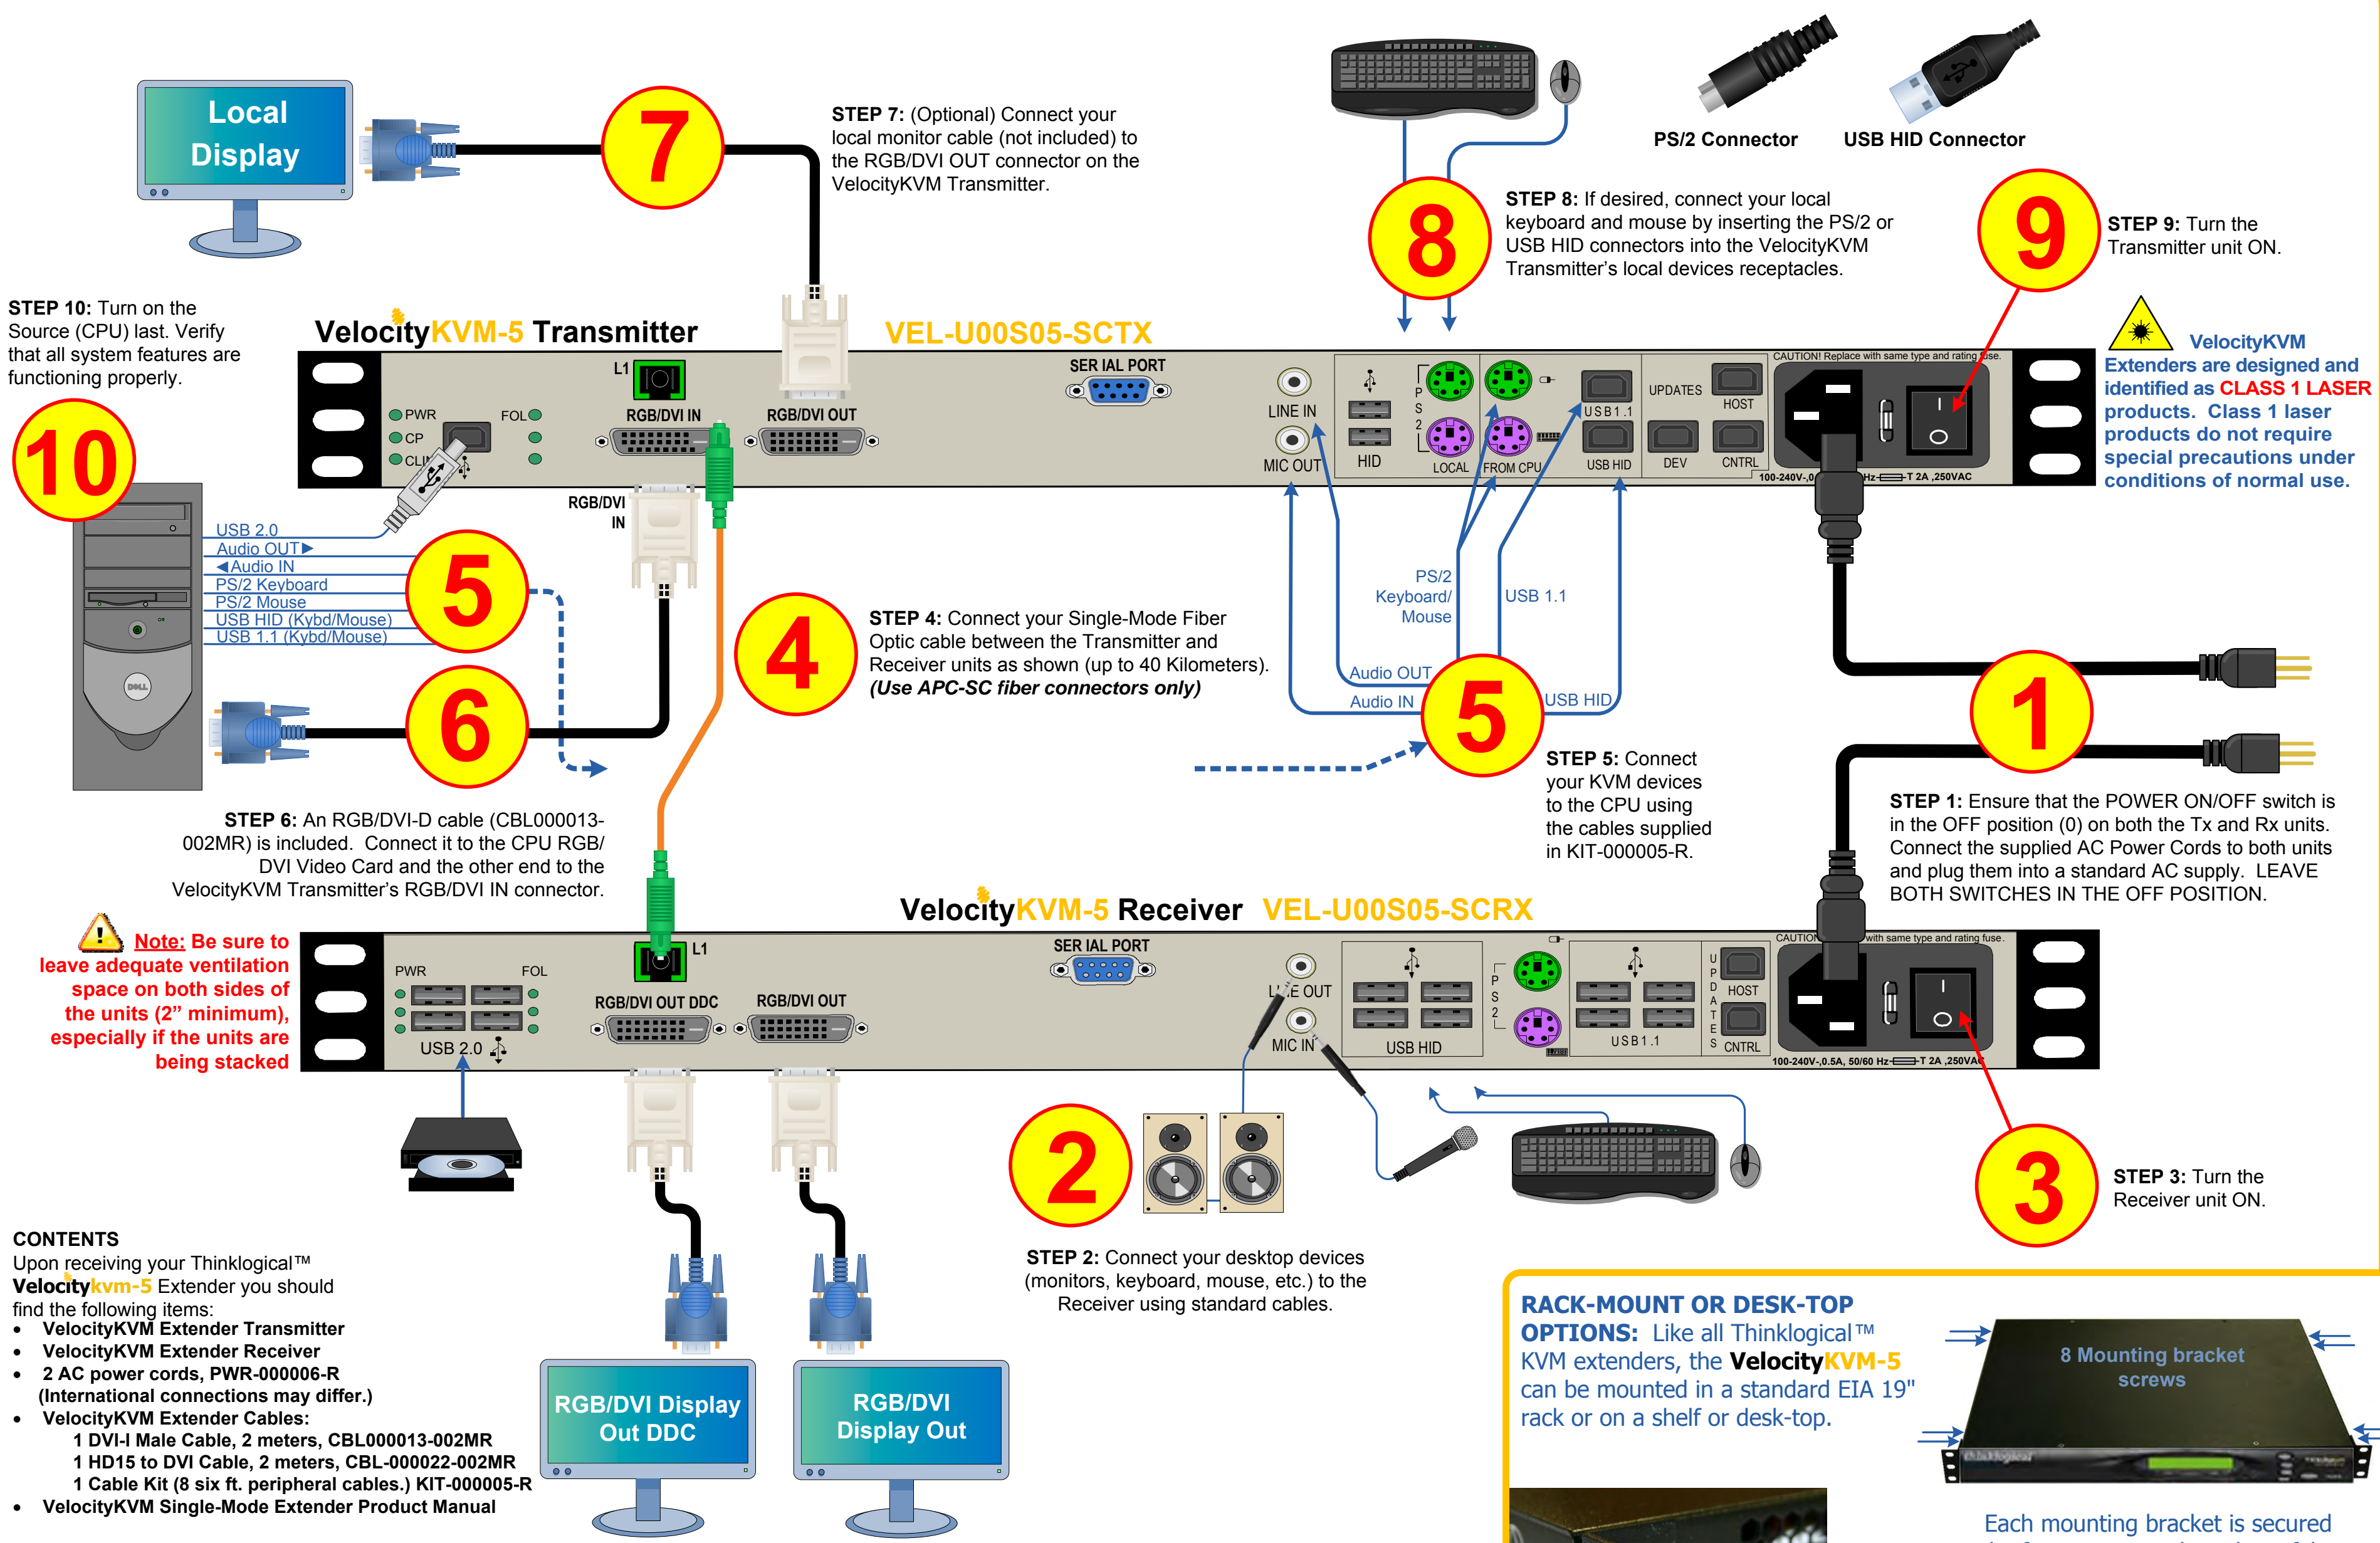

STEP 10: Turn on the Source (CPU) last. Verify that all system features are functioning properly.

10

- USB 2.0
- Audio OUT
- Audio IN
- PS/2 Keyboard
- PS/2 Mouse
- USB HID (Kybd/Mouse)
- USB 1.1 (Kybd/Mouse)

5

6

STEP 6: An RGB/DVI-D cable (CBL000013-002MR) is included. Connect it to the CPU RGB/DVI Video Card and the other end to the VelocityKVM Transmitter's RGB/DVI IN connector.

Note: Be sure to leave adequate ventilation space on both sides of the units (2" minimum), especially if the units are being stacked

- CONTENTS**
- Upon receiving your Thinklogical™ **Velocitykvm-5** Extender you should find the following items:
- VelocityKVM Extender Transmitter
 - VelocityKVM Extender Receiver
 - 2 AC power cords, PWR-000006-R (International connections may differ.)
 - VelocityKVM Extender Cables:
 - 1 DVI-I Male Cable, 2 meters, CBL000013-002MR
 - 1 HD15 to DVI Cable, 2 meters, CBL-000022-002MR
 - 1 Cable Kit (8 six ft. peripheral cables.) KIT-000005-R
 - VelocityKVM Single-Mode Extender Product Manual


All physical connections to the product use industry-standard connectors.




PHONE: 1-800-291-3211
 WEBSITE: www.thinklogical.com
 EMAIL: support@thinklogical.com

Visit us online at www.thinklogical.com for more product information, current updates and the complete line of Thinklogical products.

RACK-MOUNT OR DESK-TOP OPTIONS: Like all Thinklogical™ KVM extenders, the **VelocityKVM-5** can be mounted in a standard EIA 19" rack or on a shelf or desk-top.

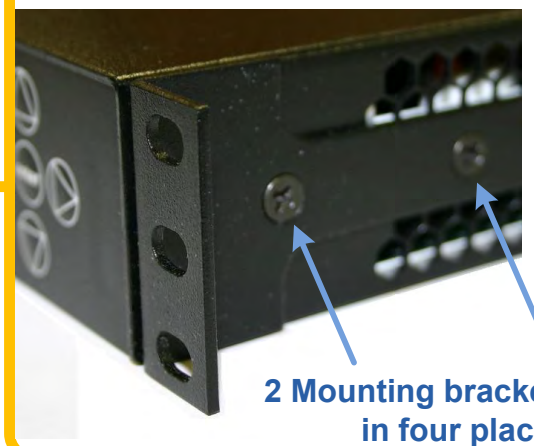

2 Mounting bracket screws in four places.

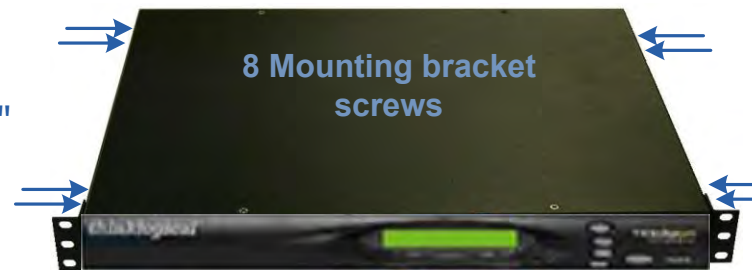

Each mounting bracket is secured by four screws and can be safely removed from the transmitter or receiver unit for desk-top mounting after power has been removed from the unit. All screws should be reinstalled after the brackets have been removed.