


Velocitykvm-24

Multi-Mode Fiber Extension – DVI Two Display

QUICK START GUIDE

Each Thinklogical™ Velocitykvm-24 Multi-Mode Fiber Optic System consists of a transmitter unit and a receiver unit connected by three multi-mode fiber optic cables (or by one optional single-mode fiber). The transmitter unit connects to the computer with standard cables and the receiver unit provides connections to the user interface devices. The Velocitykvm-24 supports PS/2, full duplex stereo audio, serial (RS-232), USB 1.0 (HID) device ports and USB 1.1. Options include USB 2.0 (high speed up to 480Mbps).

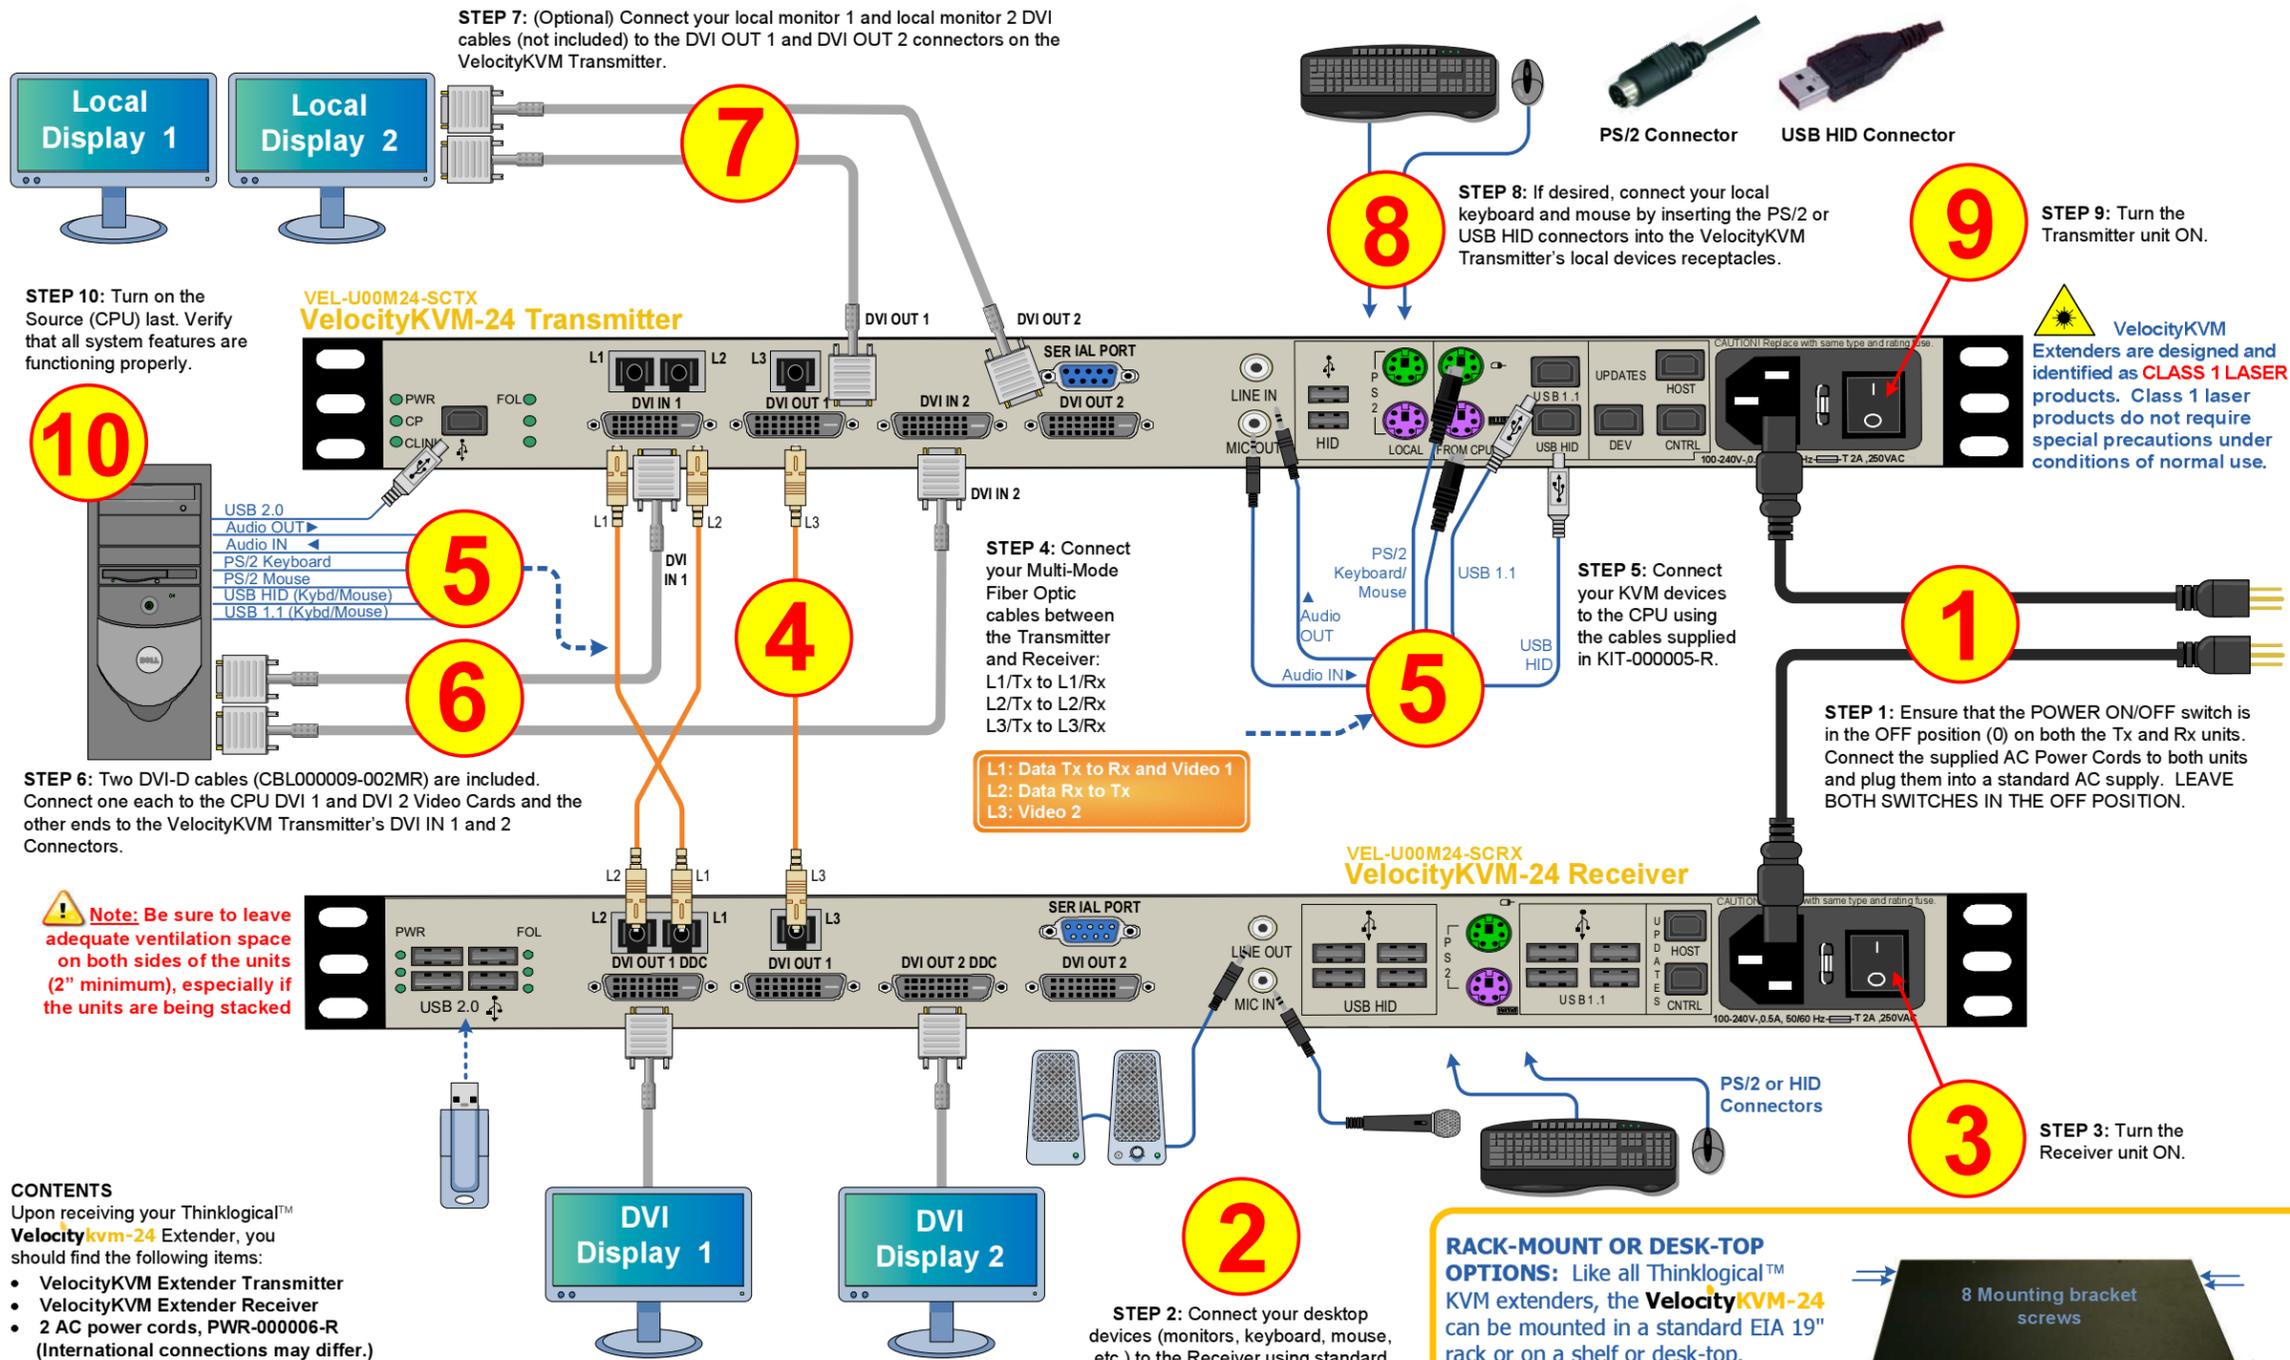

- CONTENTS**
 Upon receiving your Thinklogical™ Velocitykvm-24 Extender, you should find the following items:
- VelocityKVM Extender Transmitter
 - VelocityKVM Extender Receiver
 - 2 AC power cords, PWR-000006-R (International connections may differ.)
 - VelocityKVM Extender Cables:
 - 2 DVI-D Male Cables, 2 meters, CBL000009-002MR
 - 1 Cable Kit (8 six ft. peripheral cables.) KIT-000005-R
 - VelocityKVM Extender Product Manual

All physical connections to the product use industry-standard connectors.

RACK-MOUNT OR DESK-TOP OPTIONS: Like all Thinklogical™ KVM extenders, the VelocityKVM-24 can be mounted in a standard EIA 19" rack or on a shelf or desk-top.

Each mounting bracket is secured by four screws and can be safely removed from the transmitter or receiver unit for desk-top mounting.

thinklogical™

PHONE: (800) 291-3211
 WEBSITE: www.thinklogical.com
 EMAIL: support@thinklogical.com

Visit us online at www.thinklogical.com for more product information, current updates and the complete line of Thinklogical products.