


Velocitykvm-38

Multi-Mode Fiber Extension – DVI Two Display

QUICK START GUIDE

Each *Thinklogical™ Velocitykvm-38* Multi-Mode Fiber Optic System consists of a transmitter unit and a receiver unit connected by four multi-mode fiber optic cables (or by one optional single-mode fiber). The transmitter unit connects to the computer with standard cables and the receiver unit provides connections to the user interface devices. The *Velocitykvm-38* supports PS/2, full duplex stereo audio, serial (RS-232), USB 1.0 (HID) device ports and USB 1.1. Options include USB 2.0 (high speed up to 480Mbps).

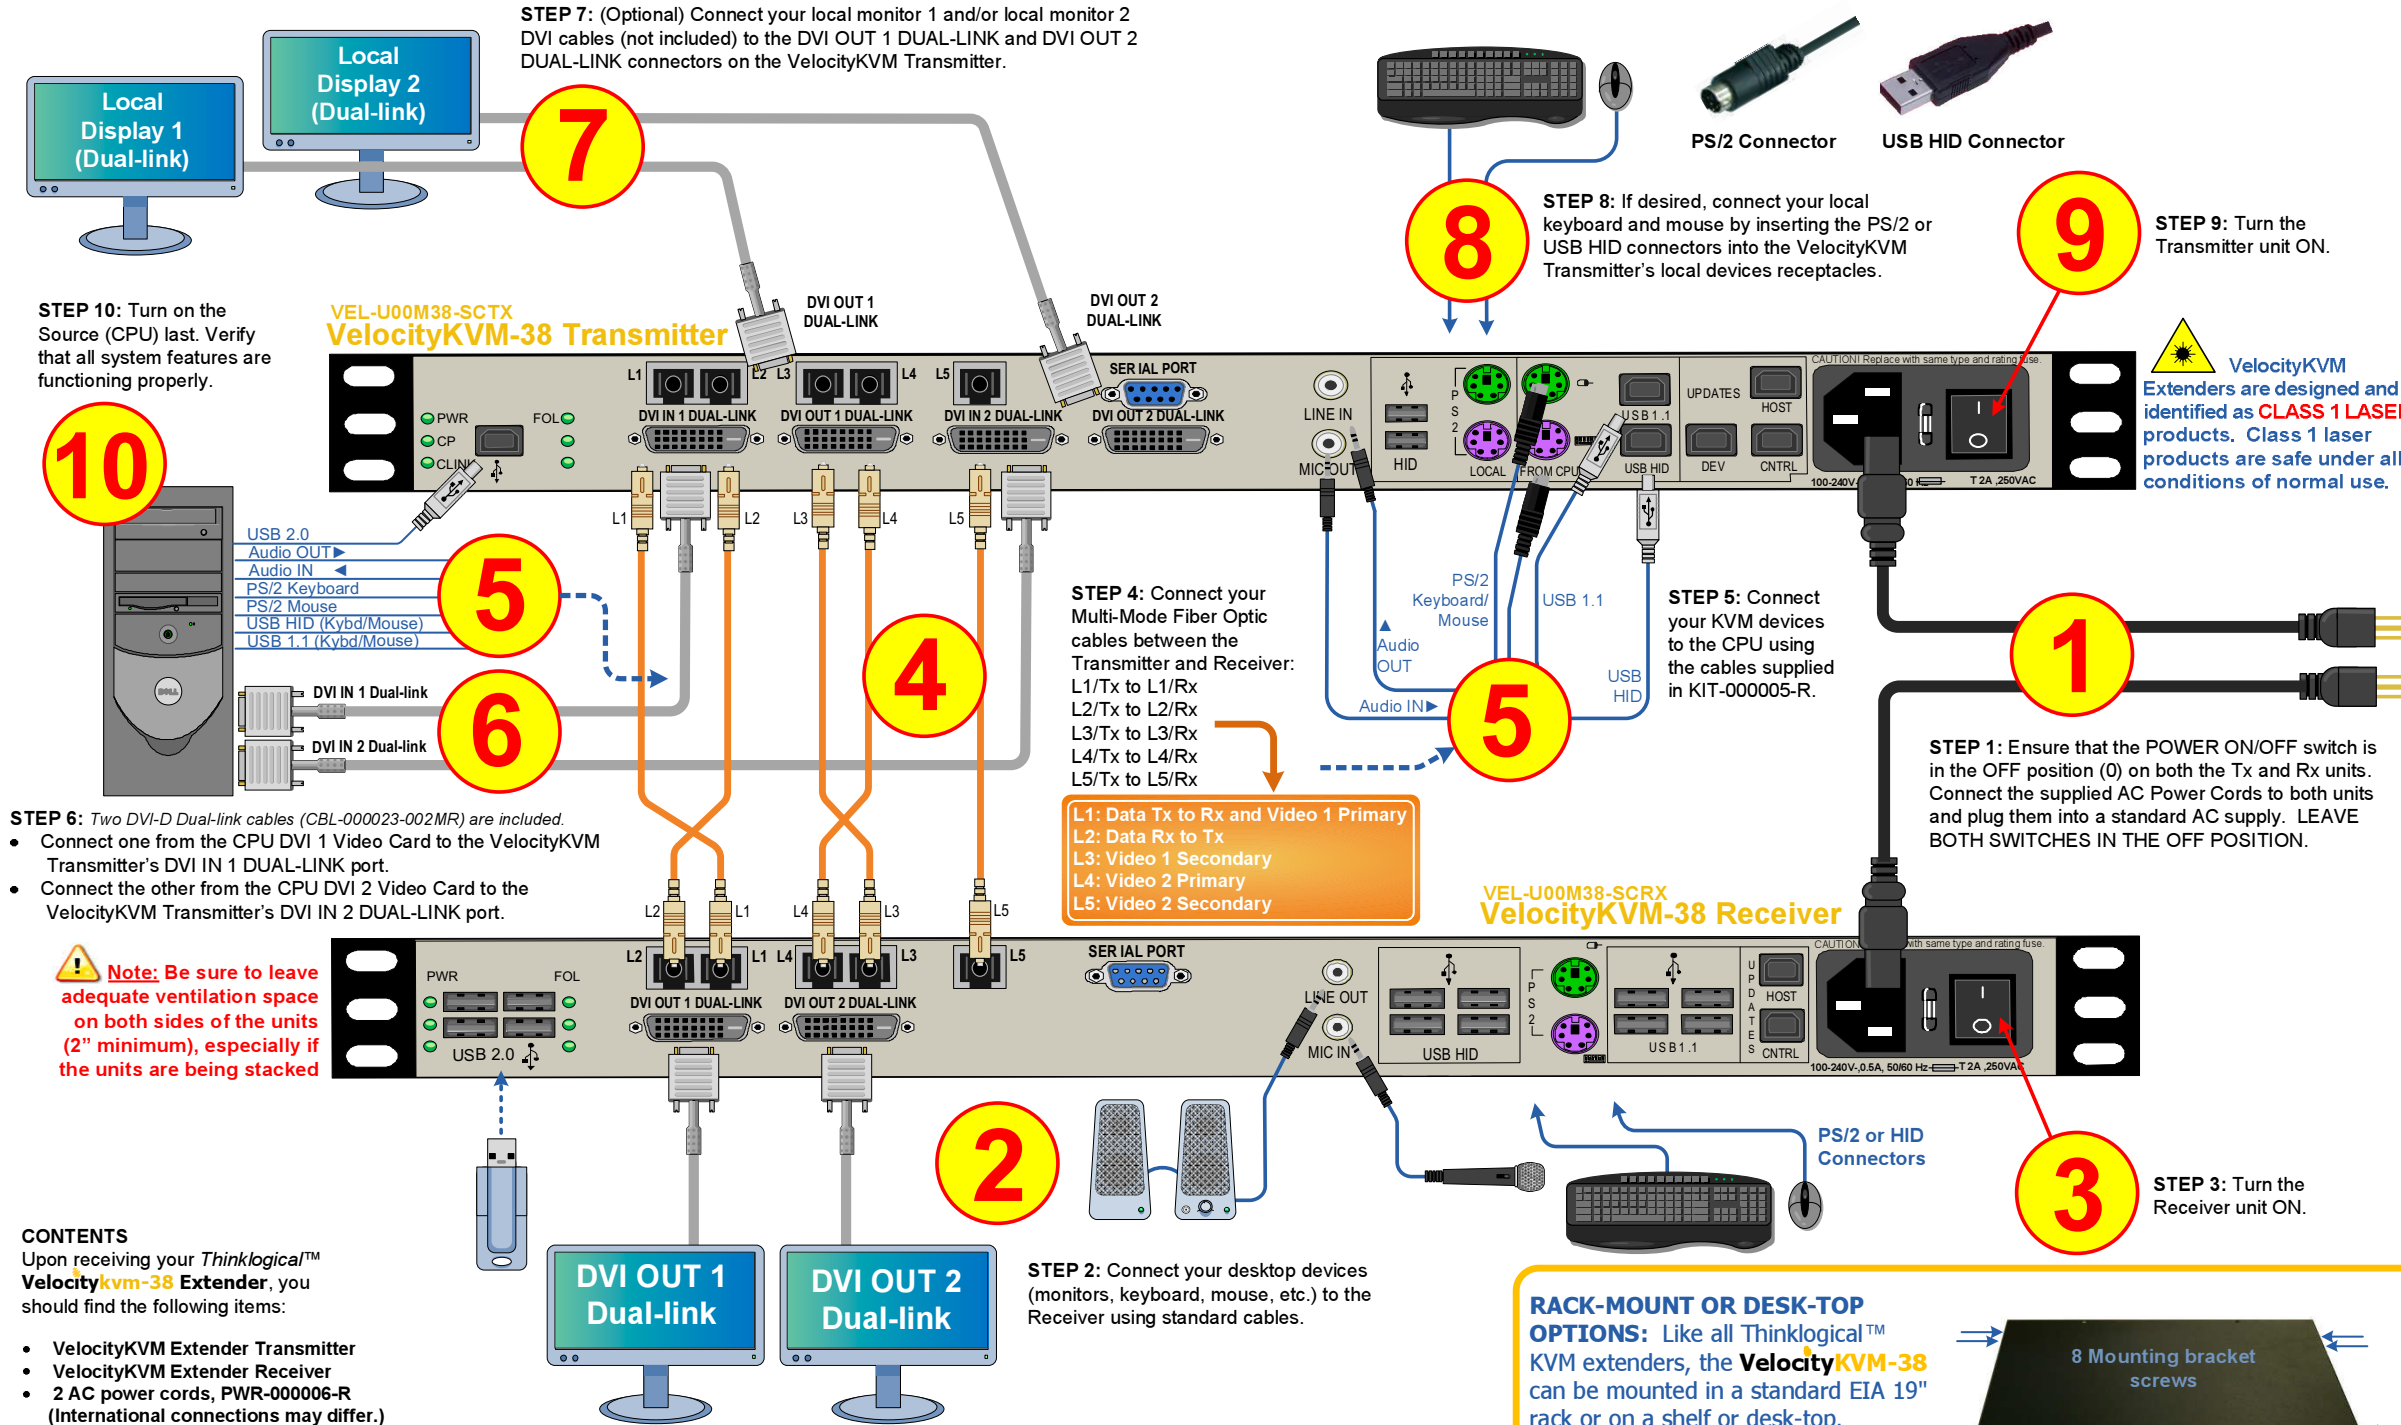

CONTENTS

Upon receiving your *Thinklogical™ Velocitykvm-38* Extender, you should find the following items:

- VelocityKVM Extender Transmitter
- VelocityKVM Extender Receiver
- 2 AC power cords, PWR-000006-R (International connections may differ.)
- VelocityKVM Extender Cables:
 - 2 DVI-D Male Dual-link Cables, 2 meters, CBL-000023-002MR
 - 1 Cable Kit (8 six ft. peripheral cables.) KIT-000005-R
- VelocityKVM Extender Product Manual


All physical connections to the product use industry-standard connectors.

thinklogical™


PHONE: (800) 291-3211
WEBSITE: www.thinklogical.com
EMAIL: support@thinklogical.com

Visit us online at www.thinklogical.com for more product information, current updates and the complete line of *Thinklogical™* products.

RACK-MOUNT OR DESK-TOP OPTIONS: Like all *Thinklogical™* KVM extenders, the *VelocityKVM-38* can be mounted in a standard EIA 19" rack or on a shelf or desk-top.



2 Mounting bracket screws in four places.

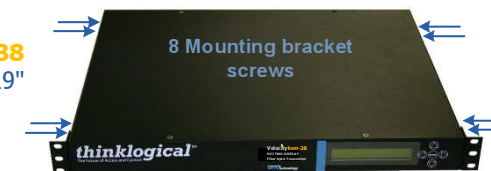

Each mounting bracket is secured by four screws and can be safely removed from the transmitter or receiver unit for desk-top mounting after power has been removed from the unit.
All screws should be reinstalled after the brackets have been removed.